



CROSSING	
TYPE	WIDTH
6.0 m LANE	6.0 m
9.0 m LANE	9.0 m
DRIVEWAY	7.5 - 9.0 m

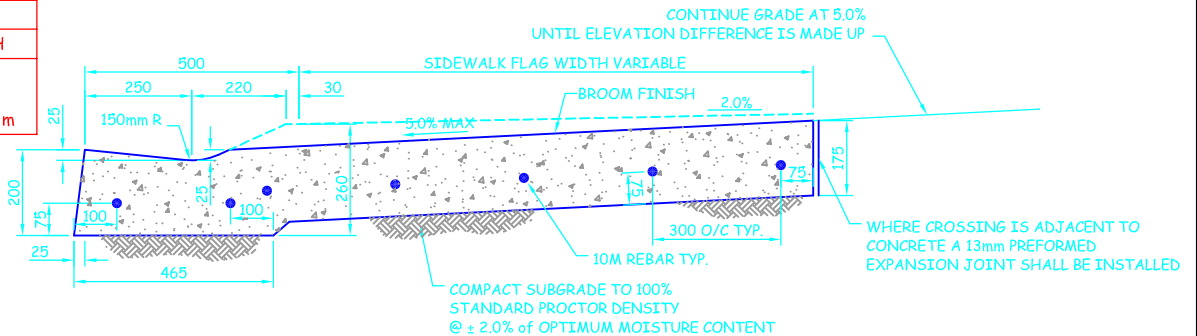

**ROLLED SECTION A-A**

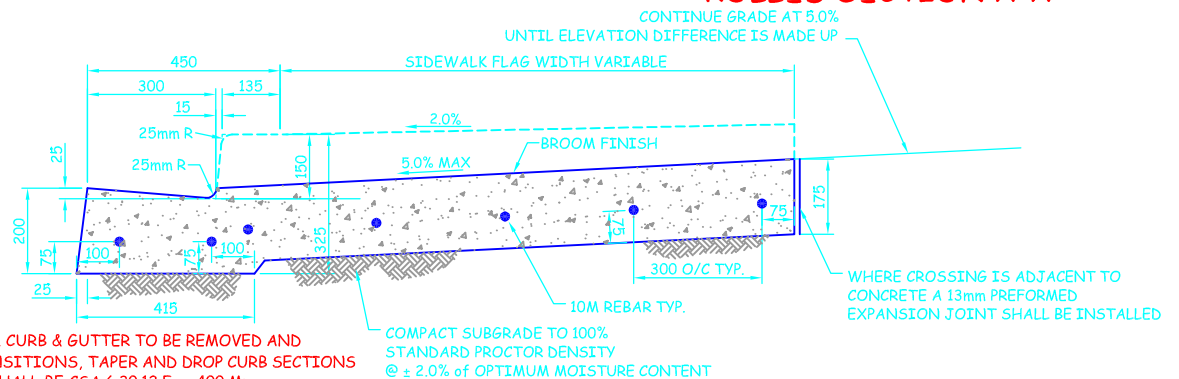

**STANDARD SECTION A-A**

**NOTES:**

1. EXISTING SIDEWALK, CURB & GUTTER TO BE REMOVED AND REPLACED WITH TRANSITIONS, TAPER AND DROP CURB SECTIONS
2. REINFORCING BARS SHALL BE CSA 6.30.12 Fy = 400 Mpa
3. ALTERNATIVE REINFORCING 150 x 150 P18/P18 GAUGE WELDED WIRE FABRIC
4. CONCRETE TO BE TYPE 50, 25 Mpa, 5%-8% AIR, WITH 300kg/m3 CEMENT. TO A MAX OF 360 kg/m3 OF CEMENTATIOUS MATERIAL
5. ALL DIMENSIONS ARE IN MILLIMETRES.

Authorized \_\_\_\_\_  
 Signature \_\_\_\_\_  
 Date \_\_\_\_\_  
 FILE: DRAWING1.DWG LAYOUT RD-202



**LOW VOLUME  
 LANE & DRIVEWAY  
 CROSSINGS**

**RD-304  
 DWG NO.**